

INTER GPV™ HELMET MOUNTED EAR DEFENDERS

PRODUCT CODE: AEK010-001-600

LIGHTWEIGHT, LOW PROFILE DESIGN. TWIN POINT MOUNTED CUPS FOR EVEN PRESSURE DISTRIBUTION. WEARER CAN TILT AND ADJUST CUP FOR OPTIMUM COMFORT AND FIT. MADE IN EXTRA-VISIBILITY ORANGE

TECHNICAL
SPECIFICATION

HEARING PROTECTION

INSTRUCTIONS FOR USE

Ear Defenders:

Fit ear defenders to the industrial safety helmet as per the instructions supplied

Position the ear defender cups at the bottom of the slots in the arms

Assembled Unit:

Fit helmet on head and fasten strap to ensure correct fit

Adjust cups until comfortably seated over each ear

COMPATIBLE WITH:



CLEANING & MAINTENANCE

The ear defenders may be cleaned with soap and warm water and dried with a soft cloth

The ear defenders should not be cleaned with chemical or abrasive cleaners

Store out of direct sunlight, away from chemicals and not exposed to extremes of temperature

INTER GPV™ FEATURES & BENEFITS

Fits the complete range of JSP helmets

The wearer can tilt and adjust the position of the cup for optimum comfort and fit, also offering even distribution of pressure

The Inter GPV™ feature a low profile and lightweight design

Thick, wide and soft cushions provide comfort for prolonged use

Made in an bright orange to allow the wearer to be seen clearly

SNR = 25



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 16/07/13, V1

INTER GPV™ HELMET MOUNTED EAR DEFENDERS

PRODUCT CODE: AEK010-001-600

LIGHTWEIGHT, LOW PROFILE DESIGN. TWIN POINT MOUNTED CUPS FOR EVEN PRESSURE DISTRIBUTION. WEARER CAN TILT AND ADJUST CUP FOR OPTIMUM COMFORT AND FIT. MADE IN EXTRA-VISIBILITY ORANGE

TECHNICAL SPECIFICATION

HEARING PROTECTION

PERFORMANCE



INTER GPV™ EAR DEFENDER PERFORMANCE ON AN EVO3®							
FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000
MEAN ATTENUATION (dB)	13.8	12.3	24.3	28.6	29.3	32.1	33.9
STANDARD DEVIATION	2.4	2.0	2.4	2.7	3.0	3.2	3.1
ASSUMED PROTECTION VALUE	11.4	10.3	21.9	25.9	26.3	28.9	30.8
	H=28dB		M=22dB		L=14dB		SNR=24dB

INTER GPV™ EAR DEFENDER PERFORMANCE ON AN EVOLITE®							
FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000
MEAN ATTENUATION (dB)	13.5	12.5	23.7	29.7	31.0	33.1	34.5
STANDARD DEVIATION	2.9	2.0	2.3	2.7	3.1	1.7	3.3
ASSUMED PROTECTION VALUE	10.6	10.5	21.4	27.0	27.9	31.4	31.2
	H=29dB		M=22dB		L=14dB		SNR=25dB

SNR

The Inter GPV™ achieved an SNR of 25 when attached to an JSP EVOLite® and an SNR of 24 when attached to an JSP EVO3®

Ear defender performance may vary when attached to other helmets

MATERIALS

Cup: ABS

Housing: Nylon 6 & Acetal

Arm: Stainless Steel Wire

Cushion: PVC

Clip: Acetal

CONFORMITY

Conforms to EN 352-3

EC Certificate Number 01748, issued by BSi Product Certification



INTER GPV™ EAR DEFENDERS:
On a JSP EVO3® Helmet



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



INTER GPV™ HELMET MOUNTED EAR DEFENDERS

PRODUCT CODE: AEK010-001-600

LIGHTWEIGHT, LOW PROFILE DESIGN. TWIN POINT MOUNTED CUPS FOR EVEN PRESSURE DISTRIBUTION. WEARER CAN TILT AND ADJUST CUP FOR OPTIMUM COMFORT AND FIT. MADE IN EXTRA-VISIBILITY ORANGE


TECHNICAL SPECIFICATION

HEARING PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 2.40kg (Approx.)

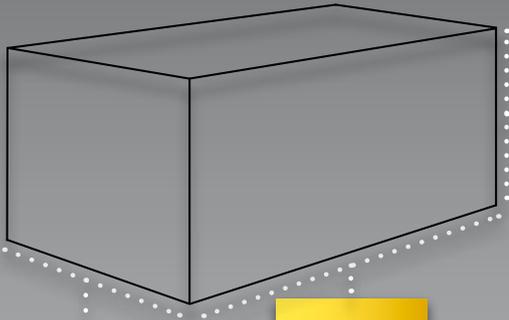

HEIGHT:
155mm

WIDTH:
290mm

LENGTH:
515mm



INTER GPV™ EAR DEFENDERS:
On a JSP EVOLite® Helmet

DIMENSIONS OF EAR DEFENDERS

Length: 100mm

Width: 50mm

Height Min: 156mm Max: 175mm

Weight: 240g (Approx.)

Ear Defender Cup Open Area: 65mm x 35mm



LIMITATIONS OF USE

Protection will only be offered if the ear defender is fitted correctly

Ear pads may deteriorate with use and should be examined at frequent intervals

The pads are available as a spare part

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The ear pads, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove the ear defender and seek medical advice

If the ear defender is to be worn for long periods the noise level must be reduced to 80dB

Before selection of a suitable ear defender a noise survey should be carried out

Spectacle frames and hair between the ear pads and the head may affect the performance of the ear defender

Hearing Protection should be used in accordance with the European Physical Agents (Noise) Directive 2003/10/EC



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 16/07/13, V1