

Product Datasheet

STD-40K/45G

Mobile Self-Contained Emergency Safety Shower

114 litre (30 US Gallons) capacity unheated mobile self-contained emergency safety shower with eye/face wash unit. Incorporating a polypropylene lined cylinder, heavy duty stainless-steel frame (powder coated for added protection) and large pneumatic tyres making it easy to manoeuvre by one person.

Options:

- Hand-held eye, face and body shower
- Insulated jacket available - offers frost protection (STD-J-40K/45G)
- Heated jacket - prevents water within the tank freezing (STD-H-40K/45G)



Specifications

MATERIALS OF CONSTRUCTION

PIPEWORK & FITTINGS	Stainless-steel
OPERATING VALVE	Stainless-steel
SHOWER NOZZLE	UPVC
STANDARD FINISH	White gloss powder coated tank

SERVICES

CAPACITY	114 litres (30 US Gallons)
WATER INLET	1/2" quick release hose connector
DESIGN OPERATING PRESSURE	2 to 5.5 Bar (29 to 80 PSI)
MINIMUM FLOW RATES	Shower: 50 litres/minute (13 US Gallons). Eye/face wash: 12 litres/minute (3 US Gallons)

AMBIENT OPERATING TEMPERATURE

MINIMUM	5C (41F)
---------	----------

OPERATION

SHOWER	Hand lever
EYE/FACE WASH	Pull lid forward

DIMENSIONS & WEIGHT

DIMENSIONS (WxDxH)	Assembled: 734mm (29in) x 1462mm (58in) x 2348mm (92in)
WEIGHT	80kg (176lb)

HUGHES




HUGHES-SAFETY.COM

Justrite Safety Group

www.hughes-safety.com

STD-40K/45G

Mobile Self-Contained Emergency Safety Shower

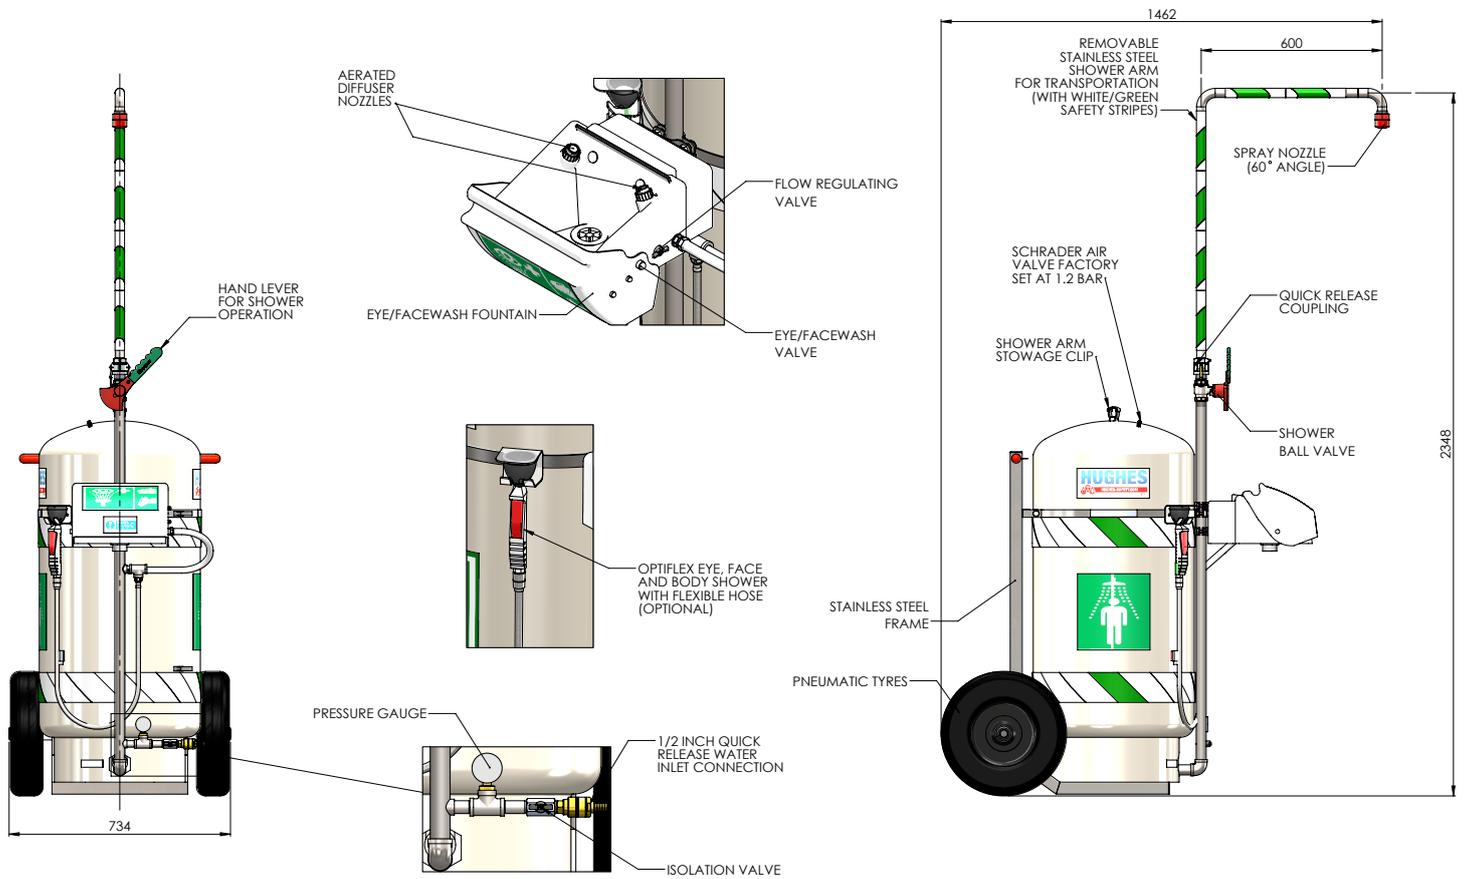

HUGHES



HUGHES-SAFETY.COM

Justrite Safety Group

Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK.

Email: sales@hughes-safety.com

Tel: +44 (0)161 430 6618

Registered No. 0939240. VAT Registration No. 918 5005 32.