



5300 Series Slim Line

Architectural
Commercial
Door Control

PDQ'S INNOVATIVE DESIGN INCLUDES A 5 LB **BARRIER[™] FREE** SPRING SETTING FOR ADA COMPLIANCE, PLUS 6 ADDITIONAL SPRING SETTINGS. THE GREATER RANGE OF SPRING SETTINGS PROVIDES 17% MORE ADJUSTMENT CAPABILITY TO FIND THAT SWEET SPOT FOR OPTIMAL DOOR CLOSING ACTION.

THE **BARRIER[™] FREE** SETTING IS AVAILABLE ON BOTH REGULAR/TOP JAMB AND PARALLEL ARM APPLICATIONS.



SPRING CUSHION STOP

SPECIFICATIONS



- HANDING:** • Non-handed
- OPERATION:** • Rack and pinion design
- BODY:** • Cast High Strength Aluminum Alloy
- ARM:** • Stamped steel main arm
- ARM OPTIONS:**
 - Hold open arm
 - DS/DSHO heavy duty parallel stop arm
 - Spring Cushion Stop for DS/DSHO
 - Track/Track Hold Open
 - EDA/EDAHO Extra Duty PA Arm.
- PISTON:** • Hardened steel
- ADJUSTMENT:**
 - Adjustable controlled closing
 - Separate hydraulic backcheck standard
 - Separate sweep, latch and backcheck intensity valves
 - Optional adjustable delayed action (in addition to backcheck)
 - Common 12" x 3/4" mounting hole pattern retrofits Norton 8300/8500® and Yale 3300/3500



FACTORY DEFAULT SPRING SETTING:

- Size 3
- Adjustable BF through 6
- MOUNTING:**
 - Fasteners furnished for hollow metal, wood or aluminum doors and frames
 - Sex nuts and bolts standard
 - Tri-packed for regular, top jamb and parallel arm installations
 - Streamline plastic cover (non-handed)
- COVER:** • Streamline plastic cover (non-handed)
- FINISHES:**
 - 605 (US3) – Polished Brass, 625 (US26) – Polished Chrome, 689 (US28) – Aluminum, 695 (N/A) – Duro Bronze, 696 (US4) – Gold

FINISHES – SPRING CUSHION STOPS:

- 605 (US3) – Bright Brass (PVD), 613 (US10B) – Oil Rubbed Bronze (PVD), 630 (US32D) – Satin Stainless Steel
- Note: PVD (Physical Vapor Deposition) coated finishes offer outstanding resistance to wear, durability and corrosion.
- CERTIFICATIONS LISTINGS COMPLIANCES:**
 - UL228 listed
 - ANSI/UL 10C listed for labeled swinging fire doors rated for up to and including 3 hours
 - Certified to ANSI/BHMA A156.4-2006 Grade 1
 - Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
 - Meets requirements of the Buy American Act
- WARRANTY:**
 - Twenty-five (25) year limited warranty

SPRING CUSHION STOPS



PDQ's SCS Series Spring Cushion Stop helps reduce wear and tear on the opening. As the door begins moving through backcheck to its maximum opening angle, the stop acts as a shock absorber, dampening the impact forces.



NOTE: PLUNGER SHOWN IN RED TO ENHANCE THE CUSHIONING FEATURE.



STOP SHOWN BEFORE DOOR IS FULLY OPENED

STOP SHOWN WHEN DOOR IS FULLY OPENED

FINISHES

ARCHITECTURAL




605 (US3)
Bright Brass, Clear Coated



613 (US10B)
Oil Rubbed Bronze,
No Coating.
Available with
SCS only.




625 (US26)
Bright Chromium
Plated, No Coating



630 (US32D)
Satin Stainless Steel,
No Coating.
Available with
SCS only.


PAINTED



689 (US28)
Aluminum



695 (N/A)
Dark Duranodic
Bronze




696 (US4)
Satin Brass (Gold)

Finishes shown are representative only. PDQ cannot guarantee that product shipped will match finishes shown. Not all products are available in all finishes listed.


REGULAR ARM

Regular arm mount is a pull side application with double lever arm. The closer mounts on the door and the arm mounts to the frame. It provides the most efficient operation for a door control and is commonly used on in-swinging doors from corridors or other interior doors. Regular arm mount is a poor choice for exterior out-swinging doors as it would put the closer on the exterior of the building. The arm assembly projects directly out from the frame. That may be a concern for vandalism or aesthetics. Regular arm application can be used with non-hold open or hold open arms.

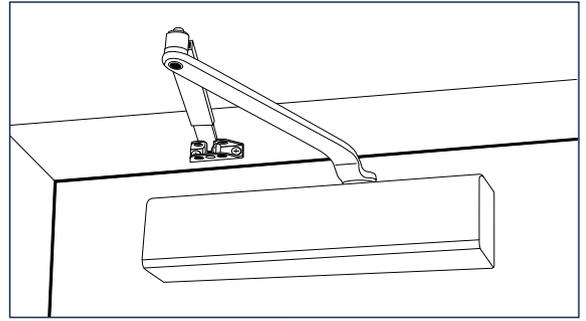


TOP JAMB

Top jamb mount is a push side double lever arm application that offers the best alternative to regular arm mount. The closer mounts to the frame and the arm mounts to the door. This application is commonly used on exterior out-swinging doors. It is a poor application for in-swinging doors from a corridor as it places the closer arm in a visible application projecting into the corridor. The arm projects out similar to regular arm mount. Therefore, it can be a concern for vandalism or aesthetics. Top jamb application can be used with non-hold open or hold open arms.

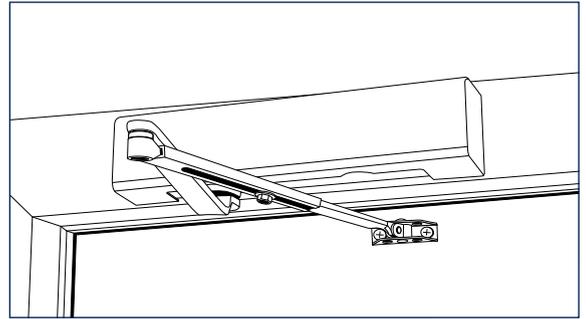

PARALLEL ARM

Parallel arm mount is a push side double lever arm application. The closer is installed on the push side of the door and the arm is mounted to a parallel arm adapter plate installed to the frame soffit. The arm is approximately parallel with the face of the door, eliminating the projection condition evident with regular arm and top jamb applications. Parallel arm is often preferred where aesthetics or vandalism are concerns. Parallel arm is less efficient than regular or top jamb mounts due to the geometry of the arm. Parallel arm application can be used with non-hold open or hold open arms.

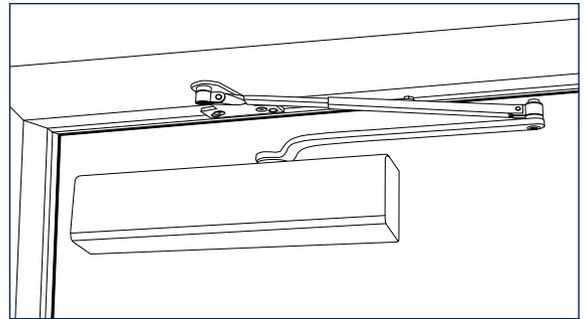


PARALLEL ARM (DS/DSHO) STOP ARM EXTRA DUTY ARM (EDA/EDAHO) ARM

The parallel stop arm mount is an enhanced version of the parallel arm application. It is similar to the parallel arm mount but incorporates a heavy duty rigid arm and soffit plate with limiting dead stop. The dead stop feature is field handed. The closer's backcheck function should be adjusted to cushion the impact of the stop. The parallel stop arm is intended for use where an auxiliary stop cannot be utilized. The parallel stop arm is available in non-hold open (DS) and hold open (DSHO) applications.




Recommend using the SCS Spring Cushion Stop for moderate to high abuse installations.

For Extra Duty PA Arm applications, specify EDA or EDAHO. Similar to DS/DSHO without the stop. Requires separate limiting stop by others.

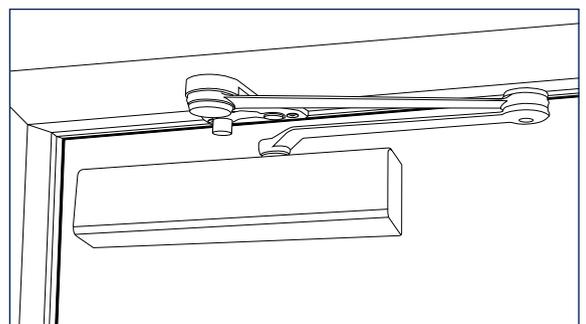


TRACK ARM (TA)


The non-handed Track Arm mount incorporates a single stamped arm not designed to be used as a limiting dead stop. Its low profile helps to eliminate projecting arm conditions, which can reduce vandal damage.

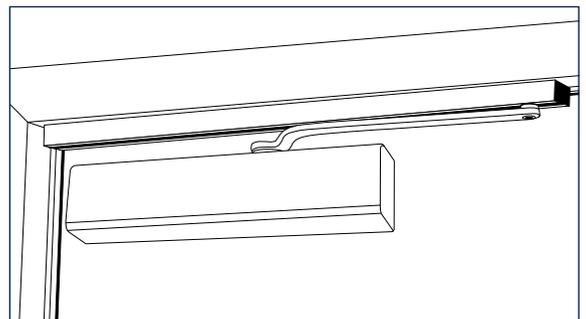


ACCESSORIES/OPTIONS




REGULAR ARM - RA* — Can be mounted REG/TJ/PA (requires PA bracket)




HOLD OPEN ARM - HO — Can be mounted REG/TJ/PA (requires PA bracket)




DOOR SAVER ARM - DS PA application only



DOOR SAVER ARM - DSHO PA application only




EXTRA DUTY ARM - EDA PA application only




EXTRA DUTY ARM HOLD OPEN - EDA HO PA application only




PARALLEL ARM DROP BRACKET - DBPA PA application only




TRACK ARM ASSEMBLY - TA TRACK ARM HOLD OPEN - TAHO




PARALLEL ARM BRACKET - PA* Non-hold open applications



PARALLEL ARM HO BRACKET - PAHO** Hold open applications




BACK PLATE - BP — For regular arm applications to clear mortised stop/holders or for TJ with limited ceiling clearance




TOP JAMB DROP PLATE - DPTJ Provides greater drop (TJ) than BP to provide clearance for surface applied stop/holder, also required for PA applications with limited top rail.




NARROW FRAME BRACKET - NFB — For use w/DS/DSHO/SCS arms & BS spacer for added reinforcement with narrow frame applications




SELF DRILLING SELF TAPPING SCREWS - SDST




SEX NUTS AND BOLTS - SNB* — For through bolting on unreinforced, hollow core, composite or labeled fire doors, 1-3/4" only



SPRING CUSHION STOP - SCS — For use w/DS/DSHO (PA mount) arms only



FULL PLASTIC COVER - FC
FULL METAL COVER (OPTIONAL) - FMC



BLADE STOP SPACER - BS — Shims all PA brackets to clear 1/2" blade stop typical on aluminum storefront frames

*Not shown - Drop Plate PA-DPPA required for PA mount with limited top door rail.

ANSI FUNCTIONS TO PDQ MODELS

			ANSI FUNCTIONS							
ANSI NUMBER	MOUNTING	PDQ MODEL	PT-4A	PT-4C	PT-4D	PT-4E	PT-4G	PT-4H	PT-4E	PT-4G
C02011	HINGE SIDE	5301BCPA		X	X	X	X			X
		5341BCPA		X	X	X	X	X		X
C02021	PARALLEL	5301BCDS		X	X	X	X		X	X
		5301BCDS		X	X	X	X		X	X
		5301BCPA		X	X	X	X			X
		5341BCDS		X	X	X	X	X	X	X
C02041	TOP JAMB	5341BCPA		X	X	X	X	X		X
		5301BCPA		X	X	X	X			X
C02051	HINGE SIDE HOLD OPEN	5341BCPA		X	X	X	X	X		X
		5301BCPAHO		X	X	X	X			X
C02061	PARALLEL HOLD OPEN	5341BCPAHO		X	X	X	X	X		X
		5301BCDSHO		X	X	X	X		X	X
		5301BCPAHO		X	X	X	X			X
		5341BCDSHO		X	X	X	X	X	X	X
C02081	TOP JAMB HOLD OPEN	5341BCPAHO		X	X	X	X	X		X
		5301BCPAHO		X	X	X	X			X
C02211	HINGE SIDE TRACK	5341BCPAHO		X	X	X	X	X		X
		5301BCTA		X	X	X	X			X
C02221	HINGE SIDE HOLD OPEN TRACK	5341BCTA		X	X	X	X	X		X
		5301BCPA		X	X	X	X			X
C03011	HINGE SIDE	5341BCPA		X	X	X	X	X		X
		5301BCPA		X	X	X	X			X
C03021	PARALLEL	5341BCDS		X	X	X	X	X	X	X
		5341BCPA		X	X	X	X	X		X
		5301BCPA		X	X	X	X			X
C03041	TOP JAMB	5341BCPA		X	X	X	X	X		X
		5301BCPAHO		X	X	X	X			X
C03051	HINGE SIDE HOLD OPEN	5341BCPAHO		X	X	X	X	X		X
		5301BCDSHO		X	X	X	X		X	X
C03061	PARALLEL HOLD OPEN	5301BCPAHO		X	X	X	X			X
		5341BCDSHO		X	X	X	X	X	X	X
		5341BCPAHO		X	X	X	X	X		X
C03081	TOP JAMB HOLD OPEN	5301BCPAHO		X	X	X	X			X
		5341BCHOHO		X	X	X	X	X		X
		5341BCTAHO		X	X	X	X	X		X
C03211	HINGE SIDE TRACK	5301BCTA		X	X	X	X			X
C03221	HINGE SIDE TRACK HOLD OPEN	5301BCTAHO		X	X	X	X			X

HOW TO ORDER

SERIES	SIZE	OPTIONS	ACCESSORIES			
Closer Series 5300	Adjustable Size  BF-6 BF = Barrier Free	DS – Door Saver Arm DSHO – Door Saver Hold Open Arm ³ EDA – Extra Duty Arm ² EDA HO – Extra Duty Arm Hold Open ^{2,3} HO – Hold Open, Tri-Pack ³ PA – Tri-Pack (standard) SCS – Spring Cushion Stop SCSHO – Spring Cushion Stop Hold open TA – Track Arm ³ TAHO – Track Arm Hold Open ³	Blank – SNB & Streamline (53) or Full (55) Plastic Cover (Standard) DBPA – Parallel Arm Drop Bracket BP – Back Plate BS – Blade Stop Spacer DPTJ – Top Jamb Drop Plate DPPA – Parallel Arm Drop Plate NFB – Narrow Frame Bracket SDST – Self Drilling Self Tapping Screws			
53	0	1	BC	PA	689	BP
0 – Non-Delayed Action 4 – Delayed Action (In Addition To Backcheck)		BC – Adjustable Hydraulic Backcheck (Standard)			605 – Polished Brass 625 – Polished Chrome 689 – Aluminum 695 – Duro Bronze 696 – Gold	
DELAYED ACTION		BACKCHECK			FINISH	

NOTES

- 1 - Case quantity is 6 / Case weight is 50 lbs.
- 2 - Requires separate limiting stop by others.
- 3 - Not appropriate for use on fire labeled doors

SIZE SELECTOR PARALLEL ARM/REGULAR/TOP JAMB

APPLICATION	CLOSER SIZE	INTERIOR	EXTERIOR
Regular / Top Jamb	 BF	5 lbf (36" door)	NA
	1	32"	28"
	2	36"	32"
	3	42"	36"
	4	48"	42"
	5	54"	48"
	6	58"	54"
Parallel Arm	 BF	5 lbf (36" door)	NA
	1	28"	NA
	2	32"	28"
	3	36"	32"
	4	42"	36"
	5	48"	42"
	6	54"	48"

Note: 53/5500 Series Closers can be adjusted to meet ADA barrier free applications. Strict compliance with ADA barrier free requirements may result with door not fully closing and latching. Check with local AHJ. Closer sizes may vary due to site conditions.

CROSS REFERENCE

MANUFACTURER	PDQ	CAL ROYAL®	CORBIN/RUSSWIN®	DORMA	DOR-O-MATIC®	HAGER®	LCN®	NORTON/YALE®	SARGENT®	STANLEY®
SERIES	5300 Foot Pattern 12"X 3/4"	801S	DC3200	8616	SC80	5200	1460/1461	8301/3301	1430	D-3550
MOUNTING HOLE PATTERN RETRO-FIT	YES	YES	NO	YES	YES	NO	NO	YES	NO	NO

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

SUGGESTED ARCHITECTURAL SPECIFICATIONS

All door closers shall be narrow projection PDQ 5300 Series with full rack and pinion construction, heavy duty cast aluminum closer body, stamped flat style arm assembly and full cover. Hydraulic control shall be through separate hex-key noncritical sweep, latch and backcheck adjustment. Optional delayed action to be effective from maximum opening to approximately 70 degrees. Closers shall be non-handed, suitable for regular, top jamb and parallel arm

applications with fasteners for wood or metal doors and frames. Sex nuts and bolts shall be furnished standard. Spring adjustment to be provided throughout a range of sizes 1-6 and capable of meeting barrier free opening force requirements. All products carry a 25-year manufacturer's limited warranty. Closers shall be listed by U.L./U.L.C., comply with UL 10C and UBC 7-2 (1997) for positive pressure and certified to ANSI A156.4 Grade 1.

WHEN TIME EQUALS MONEY

PDQ'S PRIORITY QUICKSHIP DELIVERS

AUBURN, WA 98001

**2754 CREEK HILL ROAD
LEOLA, PA 17540**

SALT LAKE CITY, UT 84115

KANSAS CITY, MO 64116

Our Four Distribution Centers are ideally located to provide quick delivery throughout the entire United States. Priority Quickship items will ship same day or next day after the order is received. Contact your sales representative or PDQ Customer Service for more information.



Headquarters: 2754 Creek Hill Road • Leola, PA 17540 • 800.441.9692 • 717.656.6892 Fax
Regional Distribution Centers: Kansas City, MO, Salt Lake City, UT, Seattle, WA
www.pdqlocks.com

PDQ'S 5300 Series Brochures are now printed entirely on Forest Stewardship Council™ certified paper. FSC Certification ensures that the paper used in this catalog contains fiber from well-managed and responsibly harvested forests that meet strict environmental and socioeconomic standards. We're proud to be one of the first hardware manufacturers in the country to make this significant move to help our environment. The FSC logo on our brochure signals not only FSC Certification, but also PDQ's commitment to improving the environment.

