



EXIT DEVICES

6200 Architectural Series Wide Stile

6202 Architectural Series Narrow Stile

6200 Wide Stile



6202 Narrow Stile



TABLE OF CONTENTS

6200/6202 QUICK REFERENCE GUIDE	2
6200 ARCHITECTURAL SERIES WIDE STILE	
6200R RIM	4-6
6200V SURFACE VERTICAL ROD	7-9
6200CV CONCEALED VERTICAL ROD	10-11
6200M MORTISE	12-13
6202 ARCHITECTURAL SERIES NARROW STILE	
6202R RIM	15-16
6202V SURFACE VERTICAL ROD	17-18
6202CV CONCEALED VERTICAL ROD	19-20
6200/6202 SERIES ARCHITECTURAL TRIM	
6EW HEAVY DUTY TRIM	21-24
6EWM HEAVY DUTY MORTISE TRIM	25
6EN NARROW ESCUTCHEON TRIM	26
6SH SECTIONAL TRIM	27
6GP PLATE TRIM	28
6GW GRIP WIDE PLATE TRIM	29
6GN GRIP NARROW PLATE TRIM	30
9E OFFSET PULL	31
6EWS PDQ SMART HEAVY DUTY TRIM	32,34
6EWS+ PDQ SMART HEAVY DUTY TRIM	33-35
ELECTRIFIED ACCESS CONTROLS	
MOTORIZED LATCH RETRACTION/ELECTRIC DOGGING	36-37
6EW199A ELECTRIC LOCKING/UNLOCKING ESCUTCHEON TRIM	38-40
E629 STAND-ALONE (OFFLINE) KEYPAD ESCUTCHEON TRIM	41-43
LATCH BOLT MONITOR	44
REQUEST TO EXIT	45
BATTERY POWERED ALARM	46
ELECTRIFIED HINGES	47
POWER SUPPLIES	48
KEY SWITCHES	49
OPTIONS AND ACCESSORIES	
CYLINDER DOGGING	50
MULLIONS	51
MISCELLANEOUS ACCESSORIES	52
STRIKES	53-54
TRIM CROSS REFERENCE TABLES (OLD PDQ TO NEW PDQ MODELS)	53
DOOR WIDTH CHART	57
TRIM DIMENSIONS	58-60
FINISHES	61
ARCHITECTURAL SPECIFICATIONS	62



6200/6202 QUICK REFERENCE GUIDE


	ARCHITECTURAL WIDE STILE				ARCHITECTURAL NARROW STILE		
	6200R	6200V	6200CV	6200M	6202R	6202V	6202CV
	RIM	SURFACE VERTICAL ROD	CONCEALED VERTICAL ROD	MORTISE	RIM	SURFACE VERTICAL ROD	CONCEALED VERTICAL ROD
DEVICE							
CERTIFICATIONS/LISTINGS/WARRANTY							
BHMA CERTIFIED TO ANSI A156.3 GRADE 1	●	●	●	●	●	●	●
FIRE LISTED TO UL10C	●	●	●	●	●	●	●
UL 305 LISTED FOR PANIC	●	●	●	●	●	●	●
FBC WINDSTORM LISTED	●	●					
LIMITED WARRANTY	10 YEAR	10 YEAR	10 YEAR	10 YEAR	10 YEAR	10 YEAR	10 YEAR
MECHANICAL OPTIONS							
3 FT DOORS	●	●	●	●	●	●	●
4 FT DOORS	●	●	●	●	●	●	●
LESS BOTTOM ROD		●	●			●	●
CYLINDER DOGGING	●	●	●	●	●	●	●
ELECTRICAL OPTIONS							
ALARM	●	●	●	●	●	●	●
LATCH BOLT MONITORING	●			●	●		
MOTORIZED LATCH RETRACTION	●	●	●	●	●	●	●
REQUEST TO EXIT SIGNAL SWITCH	●	●	●	●	●	●	●
REQUEST TO EXIT DUAL SIGNAL SWITCH	●	●	●	●	●	●	●
TRIM							
WIDE STILE ESCUTCHEON	●	●	●	●			
NARROW STILE ESCUTCHEON	●	●			●	●	●
SECTIONAL	●	●					
GRIP PULL	●	●			●	●	●
PLATE AND PULL	●	●					
ELECTRIFIED ACCESS CONTROL							
MOTORIZED LOCKING/UNLOCKING (FAIL SECURE/FAIL SAFE)	●	●	●				
STAND ALONE KEYPAD	●	●					
LEVER SHAPES							
BOSTON	●	●	●				
MIAMI	●	●	●				
PHILADELPHIA	●	●	●	●	●	●	●
ORLANDO	●	●	●				
FINISHES, DEVICES							
605 (US5) POLISHED BRASS	●	●	●				
606 (US4) SATIN BRASS	●	●					
613 (US10B) OIL RUBBED BRONZE	●	●	●		●	●	●
626 (US26D) SATIN CHROME	●	●		●			
630 (US32D) SATIN STAINLESS STEEL	●	●	●	●	●	●	●
630F (US32D) FULL SATIN STAINLESS STEEL	●	●	●	●			
ANTIMICROBIAL	●	●	●	●	●	●	●

6200 SERIES


ARCHITECTURAL WIDE STILE EXIT DEVICE




The PDQ 6200 Series offers superior durability and security in commercial applications while providing compliance with life safety and fire code requirements. The 6200 Series is ideal for stocking distributors as the exit device is universal. The function is easily determined by selecting from the extensive line of available trim options. Units are non-handed to facilitate easy field installation. The 6200 is available in a variety of architectural finishes that will compliment any decor.




RIM
ANSI TYPE 1




MORTISE
ANSI TYPE 3

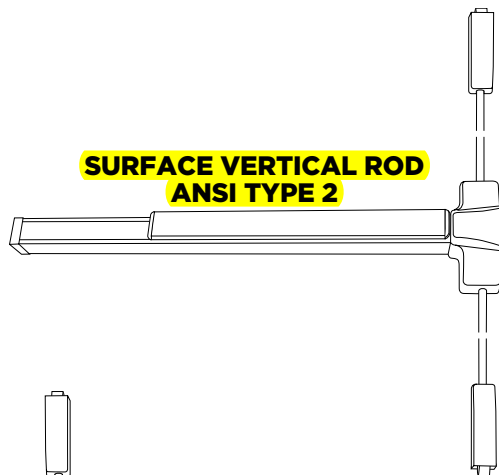


SURFACE VERTICAL ROD
ANSI TYPE 2

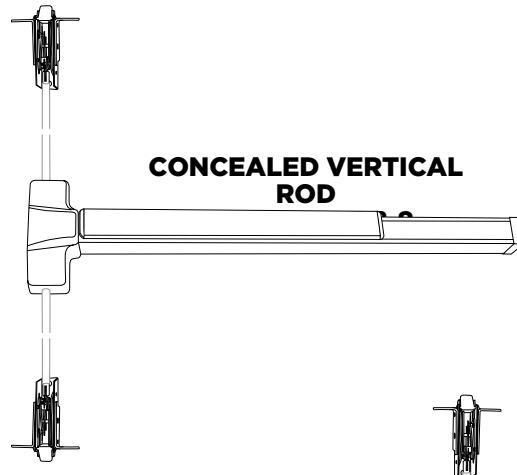

CONCEALED VERTICAL
ROD

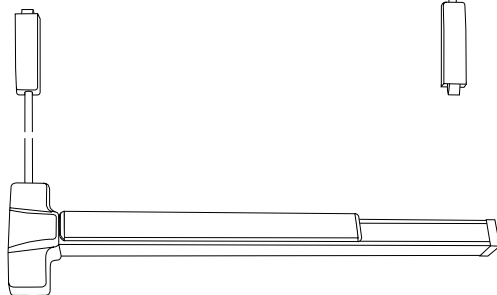


SURFACE VERTICAL ROD
(LESS BOTTOM ROD)
ANSI TYPE 2 LBR

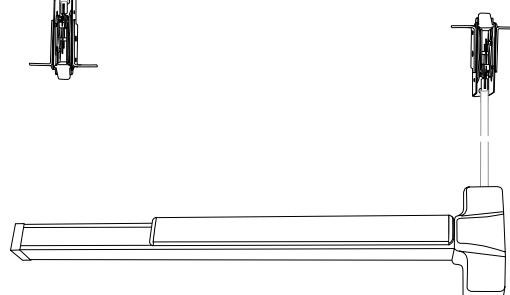

CONCEALED VERTICAL ROD
(LESS BOTTOM ROD)
ANSI TYPE 7 & 8 LBR

‡Antimicrobial protected coating technology in know to inhibit the growth of microbes. For more information, go to www.pdqlocks.com

6200 SERIES ARCHITECTURAL WIDE STILE RIM EXIT DEVICE



RIM ANSI TYPE 1

SPECIFICATIONS

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Extruded aluminum • Specify 630F for full stainless tactile surfaces (roll formed)
LATCH:	• RIM (R) – Pullman with dead latching, stainless steel, 3/4" throw
BACKSET:	• 2-3/4" backset , compatible with 161 prep.
HAND:	• Device is non-handed • Trim is non-handed or field reversible
DOGGING:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4"
DOOR THICKNESS:	• 1-3/4" standard, others vary by trim selection
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4 ft width
FINISHES:	• 605 - Polished Brass, 606 - Satin Brass, 613 - Oil Rubbed Bronze, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Tactile Surfaces • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes sex nuts, machine screws and wood screws
WARRANTY:	• Ten (10) year limited warranty
ELECTRIFIED ACCESS CONTROL OPTIONS:	• Motorized Latch Retraction • Stand Alone Key Pad Trim • Motorized Locking/Unlocking Trim • Request to Exit/Signal Switches SS/SS2 • Alarmed Exit • Latch Bolt Monitoring (rim only) • MLR Retrofit Kit - 81550K-MDT
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" up to 3 hours • Certified to ANSI/BHMA A156.3 Grade 1 • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: 3 70.0 PSF for single door (3' x 7'), 3 65.0 PSF for pairs of doors door (6' x 7') with 9200 Series Mullion • Complies with ADA (Americans with Disabilities Act) and ICC/ANSA 117.1 for Accessible and Usable Buildings • Meets requirements of the Buy America Act

CROSS REFERENCE

DESCRIPTION	PDQ	CORBIN	DORMA	FALCON	HAGER	SARGENT	VON DUPRIN	YALE
RIM, HEX DOGGING	6200R	ED5200	9300	18-R	4501 RIM O	8800	99-EO	7100
RIM, CYLINDER DOGGING	6201R	ED5200-M52	CD9300	CD-18-R	4501 RIM FR	16-8800	CD-99-EO	7105
RIM, FIRE LISTED	6200RF	ED5200A	F9300	F-18-R	4501 RIM FR	12-8800	99EO-F	7100F

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional Architectural Hardware Consultant.

6200 SERIES

ARCHITECTURAL WIDE STILE

RIM EXIT DEVICE

TRIM OPTIONS FOR 6200 SERIES RIM EXIT DEVICE

			LEVER DESIGN				ARCHITECTURAL FINISHES							PAINTED FINISHES	
ANSI FUNCTION	DESCRIPTION	TRIM TYPE	BSN	PHL	MIA	ORL	605	606	613	619	625	626	630	689	695
02	Dummy Trim (Rigid Lever)	6 EW 02													
		6 EN 02													
		6 SH 02													
		6 GP 02													
		6 GW 02													
03	Night Latch	6 EN 03 or 04													
		6 GP 03 or 04													
04	Night Latch with Cylinder Dogging	6 GW 03 or 04													
05	Classroom w/ Thumbpiece	6 GW 05													
08	Classroom w/Lever	6 EW 08													
		6 SH 08													
09	Storeroom w/Lever	6 EW 09													
		6 SH 09													
14	Passage w/Lever	6 EW 14													
		6 EN 14													
		6 SH 14													
15	Passage w/ Thumbpiece	6 GW 15													

6200 SERIES

ARCHITECTURAL WIDE STILE


RIM EXIT DEVICE

HOW TO ORDER

SERIES	DEVICE TYPE	DOOR WIDTH	FINISH
Exit Device Series	R - Rim	BLANK - For 3' Doors (Default) A - For doors up to 4' Consult Door Width Chart to determine correct device for your application	605 - Polished Brass 606 - Satin Brass 613 - Oil Rubbed Bronze 626 - Satin Chrome 630 - Satin Stainless Steel 630F - Full Satin Stainless Steel Touchbar and Rail
62	R	—	630
00 - Hex Key Dogging (Default) 01 - Cylinder Dogging * Dogging Not Furnished With Fire Listed Devices	BLANK - Panic Listed (Default) F - Fire Listed	AL LHR - Alarm Option, Left Hand Reverse AL RHR - Alarm Option, Right Hand Reverse LM - Latch Bolt Monitoring MLR - Motorized Latch Retraction SS - Signal Switch, Request to Exit or Monitoring SS-2 - Dual Signal Switch, Request to Exit and Monitoring AM - Antimicrobial Coating FEC - Flush End Cap HVHZ - Florida HVHZ EP - PDQ Smart Electronics Package	
DOGGING	LABELING	OPTIONS	

Ordering Example: 62 00 R 630

6200 SERIES ARCHITECTURAL WIDE STILE SURFACE VERTICAL ROD EXIT DEVICE

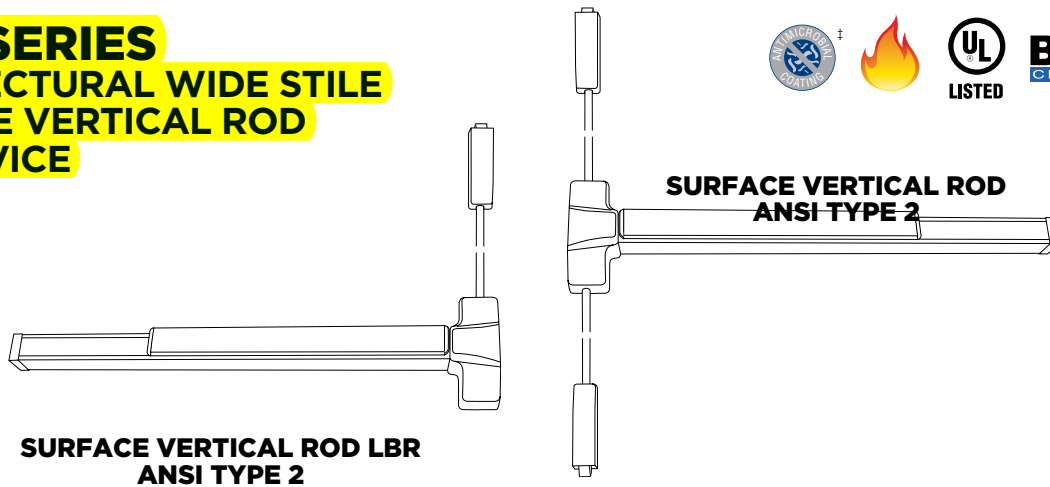

SPECIFICATIONS

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Extruded aluminum • Specify 630F for full stainless tactile surfaces (roll formed)
LATCH:	• Top Latch-Pullman with dead latching 5/8" throw • Bottom Latch- Pullman with 5/8" throw, held retracted during door swing
BACKSET:	• 2-3/4" backset , compatible with 161 prep.
HAND:	• Device is non-handed • Trim is non-handed or field reversible
DOGGING:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4"
DOOR THICKNESS:	• 1-3/4" standard, others vary by trim selection
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4 ft width
FINISHES:	• 605 - Polished Brass, 606 - Satin Brass, 613 - Oil Rubbed Bronze, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Tactile Surfaces • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes sex nuts, machine screws and wood screws
VERTICAL RODS:	• Stock for 7' doors standard. Extension rods available for doors up to 10'.
WARRANTY:	• Ten (10) year limited warranty
ELECTRIFIED ACCESS CONTROL OPTIONS:	• Motorized Latch Retraction • Stand Alone Key Pad Trim • Motorized Locking/Unlocking Trim • Request to Exit/Signal Switches SS/SS2 • Alarmed Exit • MLR Retrofit Kit - 81550K-MDT
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. 3 65.0 PSF for pairs of doors door (6' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSA 117.1 for Accessible and Usable Buildings • Meets requirements of the Buy America Act

CROSS REFERENCE

DESCRIPTION	PDQ	CORBIN	DORMA	FALCON	HAGER	SARGENT	VON DUPRIN	YALE
SURFACE VERTICAL ROD HEX DOGGING	6200V	ED5400	9400	18-V	4501 SVR O	8700	9927-EO	7110
SURFACE VERTICAL ROD CYLINDER DOGGING	6201V	ED5400-M52	CD9400	CD-18-V	4501 SVR CD	16-8700	9927-EO-F	7115
SURFACE VERTICAL ROD FIRE LISTED	6200VF	ED5400A	F9400	F-18-V	4501 SVR FR	12-8700	9927-EO-F	7110F
SURFACE VERTICAL ROD HEX DOGGING LESS BOTTOM ROD	6200VLBR	ED5400-M55	F9400 LB	18-V-LBR	4501 LBR O	NB8700	9927-EO-LBR	7170 LBR
SURFACE VERTICAL ROD CYLINDER DOGGING LESS BOTTOM ROD	6201VLBR	ED5400-M55-M52	CD9400 LB	CD-18-V-LBR	4501 LBR CD	16-NB8700	CD-9927-EO-LBR	7175 LBR

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional Architectural Hardware Consultant.

6200 SERIES

ARCHITECTURAL WIDE STILE

SURFACE VERTICAL ROD

EXIT DEVICE

TRIM OPTIONS FOR 6200 SERIES SURFACE VERTICAL ROD EXIT DEVICE

ANSI FUNCTION	DESCRIPTION	TRIM TYPE	LEVER DESIGN				ARCHITECTURAL FINISHES							PAINTED FINISHES	
			BSN	PHL	MIA	ORL	605	606	613	619	625	626	630	689	695
02	Dummy Trim (Rigid Lever)	6 EW 02													
		6 EN 02													
		6 SH 02													
		6 GP 02													
		6 GW 02													
03 04	Night Latch	6 EN 03 or 04													
	Night Latch with Cylinder Dogging	6 GP 03 or 04													
		6 GW 03 or 04													
05	Classroom w/ Thumbpiece	6 GW 05													
08	Classroom w/Lever	6 EW 08													
		6 EN 08													
		6 SH 08													
09	Storeroom w/Lever	6 EW 09													
		6 SH 09													
14	Passage w/Lever	6 EW 14													
		6 EN 14													
		6 SH 14													
15	Passage w/ Thumbpiece	6 GW 15													

6200 SERIES

ARCHITECTURAL WIDE STILE

SURFACE VERTICAL ROD


EXIT DEVICE

HOW TO ORDER

SERIES	DEVICE TYPE	DOOR WIDTH	OPTIONS	FINISH
Exit Device Series	V - Surface Vertical Rod	BLANK - For 3' Doors (Default) A - For doors up to 4' 3' Electrified Units cannot be cut down Consult Door Width Chart to determine correct device for your application	AL LHR - Alarm Option, Left Hand Reverse AL RHR - Alarm Option, Right Hand Reverse MLR - Motorized Latch Retraction SS - Signal Switch, Request to Exit or Monitoring SS-2 - Dual Signal Switch, Request to Exit and Monitoring AM - Antimicrobial Coating FEC - Flush End Cap HVHZ - Florida HVHZ EP - PDQ Smart Electronics Package	605 - Polished Brass 606 - Satin Brass 613 - Oil Rubbed Bronze 626 - Satin Chrome 630 - Satin Stainless Steel 630F - Full Satin Stainless Steel Touchbar and Rail
62 00*	V -	- 7	- -	630
00 - Hex Key Dogging (Standard) 01 - Cylinder Dogging * Dogging Not Furnished With Fire Labeled Devices	BLANK - Panic Listed (Default) F - Fire Listed	7 - 7ft (default) 8 - 8ft 9 - 9ft 10 - 10ft	LBR - Less bottom Rod	
DOGGING	LABELING	DOOR HEIGHT	VERTICAL RODS	

Ordering Example: 62 00 V 630

6200 SERIES ARCHITECTURAL WIDE STILE CONCEALED VERTICAL ROD EXIT DEVICE

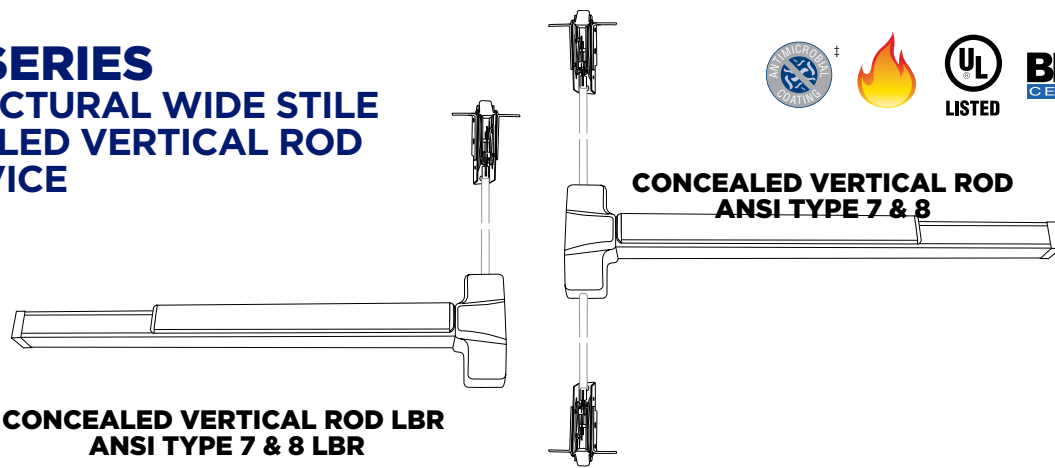

SPECIFICATIONS

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Extruded aluminum • Specify 630F for full stainless tactile surfaces (roll formed)
LATCH:	• Concealed (CV) vertical rod - Top Latch-Pullman with dead latching 5/8" throw - Bottom Latch- Pullman with 5/8" throw, held retracted during door swing
BACKSET:	• 2-3/4" backset , compatible with 161 prep. CV requires a custom prep
HAND:	• Device is non-handed • Trim is non-handed or field reversible
DOGGING:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4"
DOOR THICKNESS:	• 1-3/4" standard, others vary by trim selection
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4 ft width
FINISHES:	• 605 - Polished Brass, 606 - Satin Brass, 613 - Oil Rubbed Bronze, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Tactile Surfaces • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes sex nuts, machine screws and wood screws
VERTICAL RODS:	• Stock for 7' doors standard. Extension rods available for doors up to 10'.
WARRANTY:	• Ten (10) year limited warranty
ELECTRIFIED ACCESS CONTROL OPTIONS:	• Motorized Latch Retraction • Stand Alone Key Pad Trim • Motorized Locking/Unlocking Trim • Request to Exit/Signal Switches SS/SS2 • Alarmed Exit • MLR Retrofit Kit - 81550K-MDT
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" up to 3 hours • Certified to ANSI/BHMA A156.3 Grade 1 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSA 117.1 for Accessible and Usable Buildings • Meets requirements of the Buy America Act

CROSS REFERENCE

DESCRIPTION	PDQ	CORBIN	DORMA	FALCON	HAGER	SARGENT	VON DUPRIN	YALE
CONCEALED VERTICAL ROD HEX DOGGING	6200CV	ED5860	9100	18-C-WDC	4500 CVR	WD8600	9847-WDC-EO	7160
CONCEALED VERTICAL ROD CYLINDER DOGGING	6201CV	ED5860-M52	9100 CD	CD-18-C-WDC	4500 CVR CD	16-WD8600	CD-9847-WDC-EO	7165
CONCEALED VERTICAL ROD FIRE LISTED	6200CVF	ED5860B	F9100	F-18-C-WDC	4500 CVR FR	12-WD8600	9847-EO-F	7160F
CONCEALED VERTICAL ROD HEX DOGGING (METAL & WOOD)	6200CVF	ED5800	9100	18-C	4500 CVR	AD8600	9847-EO	7120
CONCEALED VERTICAL ROD CYLINDER DOGGING (METAL & WOOD)	6201CV	ED5800-M52	9100 CD	CD-18-C	4500 CVR CD	16-AD8600	CD9847-EO	7125
CONCEALED VERTICAL ROD FIRE LISTED (METAL & WOOD)	6200CVF	ED5800A	F9100	F-18-C	4500 CVR FR	12-AD8600	9847-EO-F	7120F

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional Architectural Hardware Consultant.

6200 SERIES

ARCHITECTURAL WIDE STILE

CONCEALED VERTICAL ROD

EXIT DEVICE

TRIM OPTIONS FOR 6200 SERIES CONCEALED VERTICAL ROD EXIT DEVICE

				LEVER DESIGN			ARCHITECTURAL FINISHES				
ANSI FUNCTION	DESCRIPTION	TRIM TYPE		BSN	PHL	MIA	605	606	613	626	630
02	Dummy Trim (Rigid Lever)	6 EN 02									
03	Night Latch	6 EN 03 or 04									
08	Classroom w/Lever	6 EN 08									
14	Passage w/Lever	6 EN 14									

HOW TO ORDER

SERIES	DEVICE TYPE	DOOR WIDTH	OPTIONS	FINISH
Exit Device Series	CV - Concealed Vertical Rod	BLANK - For 3' Doors (Default) A - For doors up to 4' 3' Electrified Units cannot be cut down Consult Door Width Chart to determine correct device for your application	AL LHR - Alarm Option, Left Hand Reverse AL RHR - Alarm Option, Right Hand Reverse MLR - Motorized Latch Retraction SS - Signal Switch, Request to Exit or Monitoring SS-2 - Dual Signal Switch, Request to Exit and Monitoring AM - Antimicrobial Coating FEC - Flush End Cap EP - PDQ Smart Electronics Package	605 - Polished Brass 613 - Oil Rubbed Bronze 630 - Satin Stainless Steel 630F - Full Satin Stainless Steel Touchbar and Rail
62 00*	CV —	— 7	— —	630
00 - Hex Key Dogging (Standard) 01 - Cylinder Dogging * Dogging Not Furnished With Fire Labeled Devices	BLANK - Panic Listed (Default) F - Fire Listed	7 - 7ft (default) 8 - 8ft 9 - 9ft 10 - 10ft	LBR - Less bottom Rod	
DOGGING	LABELING	DOOR HEIGHT	VERTICAL RODS	

Ordering Example: 62 00 CV 630

6200 SERIES ARCHITECTURAL WIDE STILE MORTISE EXIT DEVICE



MORTISE ANSI TYPE 3

SPECIFICATIONS

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Extruded aluminum • Specify 630F for full stainless tactile surfaces (roll formed)
STRIKE:	• ASA type
LOCK:	• Mortise, 13 gauge steel
LATCH:	• Stainless steel dead locking with 3/4" throw
HAND:	• Handed, field reversible • Trim is non-handed or field reversible
DOGGING:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4"
DOOR THICKNESS:	• 1-3/4"
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4 ft width • Consult door width chart to determine correct device for your application
FINISHES:	• 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Tactile Surfaces • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes sex nuts, machine screws and wood screws
WARRANTY:	• Ten (10) year limited warranty
ELECTRIFIED ACCESS CONTROL OPTIONS:	• Motorized Latch Retraction • Request to Exit/Signal Switches SS/SS2 • Alarmed Exit • MLR Retrofit Kit - 81550K-MDT
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" up to 3 hours • Certified to ANSI/BHMA A156.3 Grade 1 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSA 117.1 for Accessible and Usable Buildings • Meets requirements of the Buy America Act

CROSS REFERENCE

ANSI TYPE / FUNCTION	PDQ	CORBIN	DORMA	FALCON	HAGER	SARGENT	VON DUPRIN	YALE
MORTISE HEX DOGGING	6200MR	ED5600	9500	25-M	4500 MOR	8900	9875/9975	7130
MORTISE CYLINDER DOGGING	6201MR	ED5600-M52	9500 CD	CD25-M	4500 MOR CD	16-8900	CD9875 CD9975	7135
MORTISE FIRE LISTED	6200MRF	ED5600A	F9500	F25-M	4500 MOR FR	12-8900	9875F 9975F	7130(F)

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional Architectural Hardware Consultant.

6200 SERIES

ARCHITECTURAL WIDE STILE

MORTISE EXIT DEVICE

HOW TO ORDER

SERIES		DEVICE TYPE AND FUNCTION		DOOR WIDTH		FINISH
Exit Device Series		MR 01 – Exit Only, No Trim MR 02 – Dummy Trim MR 03 – Night Latch MR 04 – Night Latch with Cylinder Dogging MR 08 – Classroom MR 14 – Passage		BLANK – For 3' Doors (Default) A – For doors up to 4' Consult Door Width Chart to determine correct device for your application		630 – Satin Stainless Steel 630F – Full Satin Stainless Steel Touchbar and Rail
62	00*	MR 08	—	—	—	630
00 – Hex Key Dogging (Default) 01 – Cylinder Dogging * Dogging Not Furnished With Fire Listed Devices		BLANK – Panic Listed (Default) F – Fire Listed		AL LHR – Alarm Option, Left Hand Reverse AL RHR – Alarm Option, Right Hand Reverse MLR – Motorized Latch Retraction SS – Signal Switch, Request to Exit or Monitoring SS-2 – Dual Signal Switch, Request to Exit and Monitoring AM – Antimicrobial Coating FEC – Flush End Cap EP – PDQ Smart Electronics Package		
DOGGING		LABELING		OPTIONS		

Ordering Example: 62 00 MR 08 630

TRIM OPTIONS FOR 6200 SERIES MORTISE EXIT DEVICE

				LEVER DESIGN			ARCHITECTURAL FINISHES			
ANSI FUNCTION	DESCRIPTION	TRIM TYPE		BSN	PHL	MIA	605	606	613	630
02	Dummy Trim (Rigid Lever)	6 EWM 02								
03 04	Night Latch Night Latch with Cylinder Dogging	6 EWM 03 or 04								
08	Classroom w/Lever	6 EWM 08								
14	Passage w/Lever	6 EWM 14								

Note: For finishes not shown, contact PDQ Customer Service

6200 SERIES TRIM

LEVER SHAPES



Boston



Miami



Philadelphia



Orlando

TRIM TYPES



Escutcheon



Sectional



Grip pull



Pull



Plate

ANSI TRIM FUNCTIONS

FUNCTION*	DESCRIPTION
01	Exit only, no trim or blank escutcheon.
02	Entrance by trim when actuating bar is locked down (dummy trim).
03	Entrance by trim when latch bolt is released by key. Key removable only when locked (night latch).
04	Entrance by trim when latch bolt is retracted by key or set in retracted position by key (night latch with cylinder dogging). Requires 6201 device with cylinder dogging.
05	Entrance by thumb piece. Key locks or unlocks thumb piece (classroom thumb piece).
08	Entrance by knob or lever. Key locks or unlocks knob or lever (classroom).
09	Entrance by knob or lever when released by key. Key removable only when locked (storeroom).
14	Entrance by trim when latch is released by knob, lever. Always active, no cylinder (passage lever).
15	Entrance by trim when latch is released by thumb piece. Thumb piece is always active, no cylinder (passage thumb piece).
199A	Electrified Storeroom

*All functions not available in every trim style

FINISHES


ANSI (US) Description

ARCHITECTURAL

605 (US3)	Bright Brass
606 (US4)	Satin Brass
613 (US10B)	Oil Rubbed Bronze
625 (US26)	Bright Chrome
626 (US26D)	Satin Chromium
630 (US32D)	Satin Stainless Steel (Grip Pull Trim Only)
630F	Full Satin Stainless Steel Touchbar and Rail

HANDING

Out Swing Door

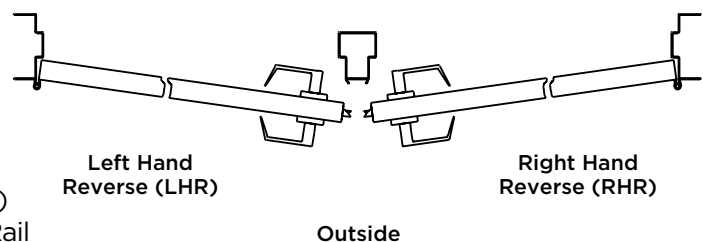

6200 SERIES TRIM

6EW HEAVY DUTY EXIT DEVICE TRIMS

UNRIVALED DURABILITY AND ACCESSIBILITY

Most manufacturers' heavy duty exit device trim is designed to just meet BHMA/ANSI standards, it's heavy-duty in name only. At PDQ we don't skimp, we designed "real" heavy-duty trim that is long lasting and easier to operate, it feels rugged and operates with unmatched smoothness. 6EW trim stands up to the most abusive and heavy traffic applications while protecting the door, the device, and helping the user.

FEATURES AND BENEFITS

- Heavy duty cast alloy (not formed steel) escutcheon that resists breakage and damage. It's built to last.
- The heavy duty trim thru-bolts directly into the exit device chassis capturing the door in between. The large surface area coverage on each side of the door makes for an almost indestructible installation. As an added bonus the design reduces the odds of the door being crushed during installation.
- A solid internal stop limits the degree of lever rotation and pressure on other parts of the unit. Device and doors enjoy a longer life.
- Innovative self-centering spring eliminates lever droop which is prevalent on other manufacturers devices as they age over time.
- 28-degree lever rotation that makes the door easier and quicker to open. The reduced travel requires less action to retract, greatly accommodating accessibility.
- Unrivalled flexibility. Classroom to Storage and Storage to Classroom functions can quickly be accomplished using a simple inexpensive conversion kit.
- Excellent for retrofits, installs into Von Duprin 98/99 Series door prep.
- Assembled in the USA - Lancaster, PA.

COMPREHENSIVE OFFERING

6 EW 199A MECHANICAL



APPLICATIONS

Extremely versatile and regularly used in education, healthcare, office, retail, and other commercial applications.

6EWS pdqSMART BLE SERIES



APPLICATIONS

pdqSMART wireless IoT access management trims complete the offering by delivering all access control system hardware components required at the door in a single integrated design.

6EWS+ pdqSMART PLUS SERIES



APPLICATIONS

The pdqSMART Plus Series expands application possibilities. Products include Grade 1 and 2 Cylindricals, Grade 1 Mortise, Deadbolt, Exit Device Trim, Smart Switch, Reader Controller and MIFARE FOB. pdqSMART Plus supports Multiple Credential Technologies including: BLE, 13.56 MHz Smart Card, iBeacon, PIN Code, and Key.

6 EW SERIES HEAVY DUTY EXIT DEVICE TRIM



**COMPATIBLE WITH 6200R RIM, 6200V SURFACE VERTICAL ROD
AND 6200CV CONCEALED VERTICAL ROD EXIT DEVICES**



- Designed for high use and abuse Grade 1 applications.
- Heavy duty cast alloy escutcheon thru-bolts directly into the exit device chassis.
- No exposed set-screws or installation fasteners.

FEATURES

- Designed for use with PDQ's 6200 series. RIM, Concealed Vertical Rod and Surface Vertical Rod exit devices.
- PVD (Physical Vapor Deposition) finish offered standard in 605 - Bright Brass, 606 - Satin Brass and 613 - Oil Rubbed Bronze. PVD coated finishes offer outstanding resistance to wear, durability and corrosion.
- Lever remains rigid when locked.
- Simple installation.
- Handing is field reversible.
- Lever rotation: 28 degrees.
- Designed and assembled by PDQ in Lancaster, PA USA.

CERTIFICATIONS, COMPLIANCES, LISTINGS

- ANSI/UL10C and CAN/ULC-5104 Listed for "Fire Exit Hardware" up to 3 hours for 4'0" x 8'0" maximum single, 8'0" x 8'0" maximum pairs.
- Certified to ANSI/BHMA A156.3-2008.
- Lever designs comply with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for accessible and Usable Buildings.
- Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

CONVERSION KITS AVAILABLE FOR CHANGING FUNCTIONS IN THE FIELD.

- For changing from 08 Classroom to 09 Storeroom, order 629089.
- For changing from 09 Storeroom to 08 Classroom, order 629098.



Direct Cam Drive to Control Locking and Unlocking



Heavy duty cast alloy internal locking components

LEVER DESIGNS



PHL - Philadelphia



BSN - Boston



MIA - Miami



ORL - Orlando

6 EW SERIES

HEAVY DUTY EXIT DEVICE TRIM

HOW TO ORDER

TYPE	LEVER SHAPES	FINISH	SPECIAL FINISH COATING	KEYWAY	KEYING
EW — Escutcheon Wide Stile	BSN — Boston MIA — Miami PHL — Philadelphia ORL — Orlando	605 — Bright Brass ⁵ 606 — Satin Brass ⁵ 613 — Oil Rubbed Bronze ⁵ 619 — Satin Nickel 625 — Bright Chrome 626 — Satin Chrome	AM — Anti-microbial	SCC	KD
6 EW PHL 08	02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage	RHR LHR	134 — 1-3/4" 200 — 2" 214 — 2-1/4"	D SCC	KD —
6				D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core	
SERIES	ANSI FUNCTION	HANDING	DOOR THICKNESS	CYLINDER OR HOUSING	

Ordering Example: 6 EW 08 PHL 626 D SCC KD

- Denotes factory default

Notes:

- 1 - All levers field handed
- 2 - Door thickness - 1-3/4", 2" or 2-1/4".
- 3 - For other door thickness applications, contact PDQ Customer Service
- 4 - Other finishes available. Contact PDQ Customer Service.
- 5 - PVD (Physical Vapor Deposition) finish standard.

CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	6CYLINDER TYPE
08	Classroom	Mortise
09	Storeroom	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981		PDQ3		
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				


KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6 EWM SERIES HEAVY DUTY EXIT DEVICE TRIM



COMPATIBLE WITH 6200M SERIES MORTISE EXIT DEVICES




HOW TO ORDER

TYPE	LEVER SHAPES	FINISH	DOOR THICKNESS	CYLINDER OR HOUSING
EWM — Escutcheon, Mortise-Wide Stile Only	BSN — Boston MIA — Miami PHL — Philadelphia	630 — Satin Stainless Steel	134 — 1-3/4"	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core
6 EWM	PHL 08	630 —	— SCC	D KD
6	02 — Dummy (Rigid Lever) 08 — Classroom 14 — Passage	AM — Anti-microbial	SCC	KD
SERIES	ANSI FUNCTION	SPECIAL FINISH COATING	KEYWAY	KEYING

Ordering Example: 6 EWM PHL 08 630 D SCC KD



Mortise Cylinder



Length Includes Cam

CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Mortise
09	Storeroom	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/2"	I127-4204
SFIC Housing, for both 6 and 7 Pin Cores	1-1/2"	I54031
LFIC Housing	1-1/2"	I54231

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981	PDQ Exclusive and Restricted	PDQ3		
Schlage E	SCE				
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				


KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6 EN SERIES NARROW ESCUTCHEON TRIM



**COMPATIBLE WITH: 6202 SERIES NARROW STILE
EXIT DEVICES, 6200 SERIES WIDE STILE RIM AND
SURFACE VERTICAL ROD EXIT DEVICES, PANIC ONLY.**




ORDERING GUIDE


TYPE	LEVER SHAPES	FINISH	KEYWAY
EN — Escutcheon, Narrow Stile	PHL — Philadelphia	613 — Oil Ribbed Bronze 630 — Satin Stainless Steel	SCC
6 EN	PHL 08	689 D	SCC KD
6	02 — Dummy (Rigid Lever) 03 — Night Latch 08 — Classroom 14 — Passage	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core	KD
SERIES	ANSI FUNCTION	CYLINDER OR HOUSING	KEYING

Ordering Example: 6 EN PHL 08 630 D SCC KD

CYLINDER REFERENCE GUIDE


ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
08	Classroom	Mortise

Mortise Cylinder **Length Includes Cam** **Rim Cylinder**

TYPE	LENGTH	PDQ CAM NUMBER
Conventional- RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981		PDQ3		
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6SH SERIES SECTIONAL TRIM



Boston



Miami



Philadelphia



**COMPATIBLE WITH PDQ 6200R RIM DEVICES AND
6200V SURFACE VERTICAL ROD EXIT DEVICES ONLY**

ORDERING GUIDE

TYPE	LEVER SHAPES		FINISH	SPECIAL FINISH COATING	KEYWAY
SH — Sectional	BSN — Boston MIA — Miami PHL — Philadelphia		605 — Bright Brass 606 — Satin Brass 613 — Oil Rubbed Bronze 626 — Satin Chrome	AM — Anti-microbial	SCC
6	SH	PHL 08	626 134	— D	SCC KD
6	02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage		134 — 1-3/4" 200 — 2" 214 — 2-1/4"	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core	KD
SERIES	FUNCTION		DOOR THICKNESS	CYLINDER OR HOUSING	KEYING

Ordering Example: 6 S PHL 08 626 134 D SCC KD



Key in Knob/
Lever Cylinder

CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	Key in Knob/Lever
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE															
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR														
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)														
PDQ Restricted	TA			KEYING <table><tr><th>DESCRIPTION</th><th>PDQ KEYING DESIGNATOR</th></tr><tr><td>Keyed Different (Default)</td><td>KD</td></tr><tr><td>Keyed Alike</td><td>KA</td></tr><tr><td>"O" Zero Bitted</td><td>KO</td></tr><tr><td>Master Keyed</td><td>MK</td></tr><tr><td>Construction Master Keyed</td><td>CMK</td></tr><tr><td>Grand Master Keyed</td><td>GMK</td></tr></table>		DESCRIPTION	PDQ KEYING DESIGNATOR	Keyed Different (Default)	KD	Keyed Alike	KA	"O" Zero Bitted	KO	Master Keyed	MK	Construction Master Keyed	CMK	Grand Master Keyed	GMK
DESCRIPTION	PDQ KEYING DESIGNATOR																		
Keyed Different (Default)	KD																		
Keyed Alike	KA																		
"O" Zero Bitted	KO																		
Master Keyed	MK																		
Construction Master Keyed	CMK																		
Grand Master Keyed	GMK																		
Arrow AR1	ARA																		
Corbin 59A1	CO59A1																		
Corbin 60	CO6																		
Corbin L4	CL4																		
Russwin D1	RUD	PDQ Exclusive	PDQ1																
Russwin 981	RUD981		PDQ2																
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3																
Schlage C	SCC																		
Schlage C-K	SCC-K																		
Sargent LA	SAL																		
Sargent RA-RC	RA-RC																		
Yale E1R	YA8																		
Yale GA	GA																		
Falcon E-R	FAL																		
Kwikset	KW																		

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6GP SERIES PLATE TRIM




Plate Trim



Pull Trim




ORDERING GUIDE

TYPE		ANSI FUNCTION		KEYWAY		KEYING	
GP — Plate		01 — Exit Only 02 — Dummy Pull 03 — Night Latch		SCC		KD	
6	GP	03	689	SCC	D	KD	
6		689 — Aluminum 695 — Dark Duranodic Bronze		D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core			
SERIES		FINISH		CYLINDER OR HOUSING			

Ordering Example: 6 P 03 689 D SCC KD



Rim Cylinder



CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM

TYPE	LENGTH	PDQ CAM NUMBER
Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981		PDQ3		
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				



KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6GW SERIES

GRIP WIDE PLATE TRIM

COMPATIBLE WITH PDQ 6200 SERIES
WIDE STILE EXIT DEVICES ONLY




ORDERING GUIDE

TYPE	ANSI FUNCTION	DOOR THICKNESS	CYLINDER OR HOUSING	KEYING
GW — Grip Pull, Wide Stile	02 — Dummy Trim 03 — Night Latch 04 — Night Latch w/Exit Device Cylinder Dogging 05 — Classroom w/Thumb Piece 15 — Passage w/Thumb Piece	134 — 1-3/4" 200 — 2" 214 — 2-1/4"	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core	KD
6 GW	03 630	134 —	D SCC	KD
6	613 — Oil Rubbed Bronze 630 — Satin Stainless Steel	AM — Anti-microbial	SCC	
SERIES	FINISH	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: **6 GW 03 134 630 D SCC KD**

Note: Trim functions 02, 03, 04 not compatible with functions 05 and 15 when used on a pair of doors.

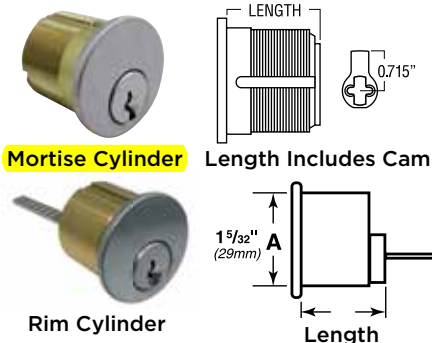

CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
05	Classroom w/Thumbpiece	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional - RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

KEYWAYS


CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6	PDQ Exclusive	PDQ1		
Corbin L4	CL4		PDQ2		
Russwin D1	RUD	PDQ Exclusive and Restricted	PDQ3		
Russwin 981	RUD981				
Schlage E	SCE				
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale EIR	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

6GN SERIES GRIP NARROW PLATE TRIM


COMPATIBLE WITH PDQ 6202 SERIES
NARROW STILE EXIT DEVICES ONLY



ORDERING GUIDE

TYPE	ANSI FUNCTION	DOOR THICKNESS	CYLINDER OR HOUSING	KEYING
GN — Grip Pull, Narrow Stile	02 — Dummy Trim 03 — Night Latch 04 — Night Latch w/Exit Device Cylinder Dogging	134 — 1-3/4" 200 — 2" 214 — 2-1/4"	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schlage® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage® Compatible LFIC Housing less core	KD
6 GN 6	03 626 613 — Oil Rubbed Bronze 630 — Satin Stainless Steel	134 — AM — Anti-microbial	D SCC SCC	KD
SERIES	FINISH	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: 6 GN 03 630 D SCC KD



CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6	PDQ Exclusive	PDQ1		
Corbin L4	CL4		PDQ2		
Russwin D1	RUD	PDQ Exclusive and Restricted	PDQ3		
Russwin 981	RUD981				
Schlage E	SCE				
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK



SECURING
CONFIDENCE
OPENING
POSSIBILITIES

Phone: 800.441.9692

Tech Support: 833.2.PDQTEC (833.273.7832)

FAX: 717.656.6892 | Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA 17603

P.O. Box 6426, Lancaster, PA 17607

**Regional Distribution Centers: Lancaster, PA | Kansas City, MO
Henderson, NV | Auburn, WA**

Design Office: Milan, Italy

pdqlocks.com