



AVK OPERATING AND SEAT WRENCH

27/C4

For series 27 dry barrel hydrant

005

The operating wrench is a multi wrench used in the daily operation of the hydrant, as well as for certain maintenance operations. The seat wrench is used when disassembling of the hydrant top is necessary, as well as for demounting the hydrant seat. Using the wrench the hydrant seat can be demounted from the ground level without excavating the hydrant.


Product Description:

Operating and seat wrench for series 27 dry barrel hydrant

Standards:

- Designed according to AWWA C502



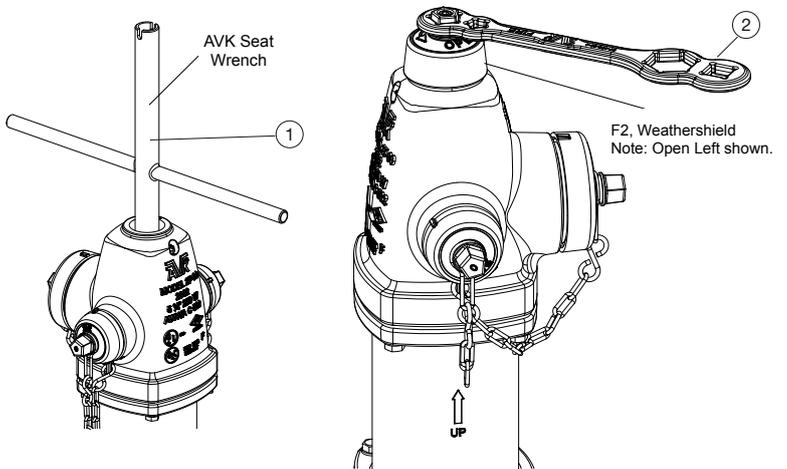

Component List:

1. Seat wrench	Epoxy coated steel	2. Operating wrench	Ductile iron
----------------	--------------------	---------------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference Nos. and Dimensions:

AVK ref. nos	DN mm	Theoretic. weight kg
27-150-30-1001 ⁽¹⁾	150	2.7
27-150-30-4001 ⁽²⁾	150	2.3

⁽¹⁾ Seat wrench
⁽²⁾ Operating wrench