
Fall Protection: Personal Protective Equipment



Rope Grabs and Vertical Lifelines

Rope Grabs are designed as a means of fall arrest between a worker wearing a compatible full-body harness and a suitable lifeline system. They are used to arrest the user in a fall from a working height and suspend the user until rescue can be affected.

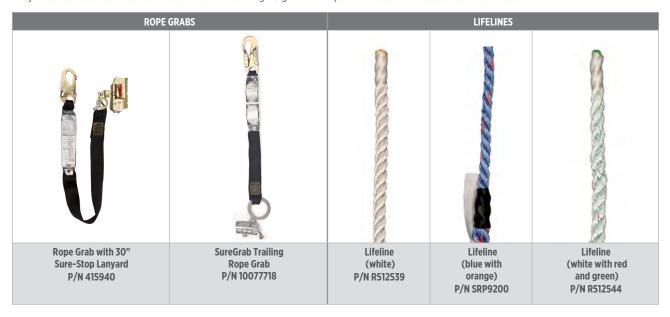

	PART NO.	Length	Panic Grab	ANSI Z359.15	CSA Z259.2.5
ROPE GRABS, TRAILING, 5/8"	415940	30"		•	
	10077718	30"			

	ANSI	CSA	Length				Base Rope
	Z359.1	Z259.2.5	25′	50'	75'	100′	Part No.
LIFELINES,			R512539LLC025	R512539LLC050	R512539LLC075	R512539LLC100	R512539
3-STRAND, 5/8"			415865	415869	415870	415871	R512539

Base Ropes	Material	Elongation at 1800 lbs.	Minimum Breaking Strength	Color		Features	
R512539	100% polyester	6.66%	7825 lbs.	white	Best UV resistance	Best UV resistance	
R512544	co-polymer core/ polyester outer	4.70%	9,450 lbs.	white w/red and gree	n Low elongation. No loss	Low elongation. No loss of strength when wet. Stores wet.	
SRP9200	co-polymer core/ polyester outer	5.25%	7530 lbs.	blue w/orange	Low elongation. No loss	Low elongation. No loss of strength when wet. Stores wet.	
Custom	Rope Lengths						
Overall Length		Up to 25'		25' - 50'	50′ – 100′	over 100'	
Overall Length Up to 25'			25' – 50'	50' – 100'	over 100'		

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit **MSAsafety.com/offices**.