



model SP157A

Scald Protect Bleed Valve

FEATURES & BENEFITS

OPTIONS

For more information, visit www.hawesco.com or call (888) 640-4297.




SPECIFICATIONS

Model SP157A scald protection bleed valve opens at 98° F (36.7° C) and closes at 95° F (35° C). 1/2" NPT inlet and outlet.


APPLICATIONS

Specifically, SP157A is suitable for several emergency applications where scalding water temperature protection is needed or required. Can be used in conjunction with most Haws shower and/or eyewash units.

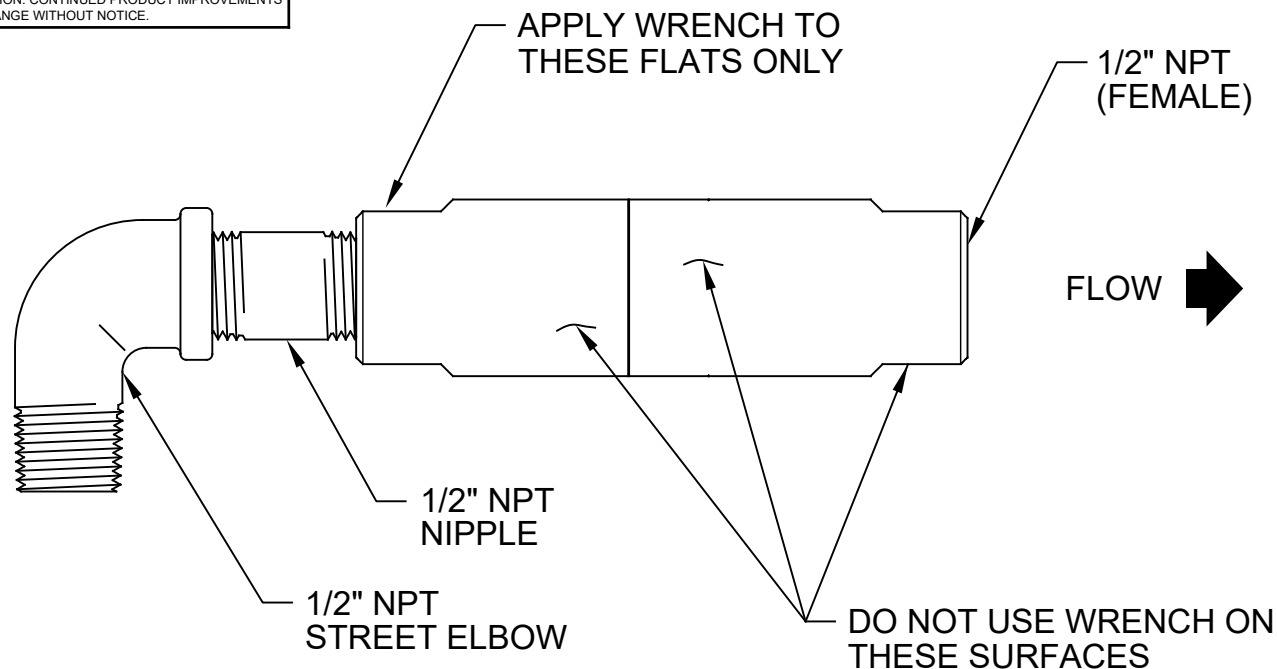


TYPICAL SHOWER EYEWASH LOOP INSTALLATION

NOTE: MODEL 8330 REQUIRES A
1-1/4" X 1/2" BUSHING (NOT SUPPLIED)

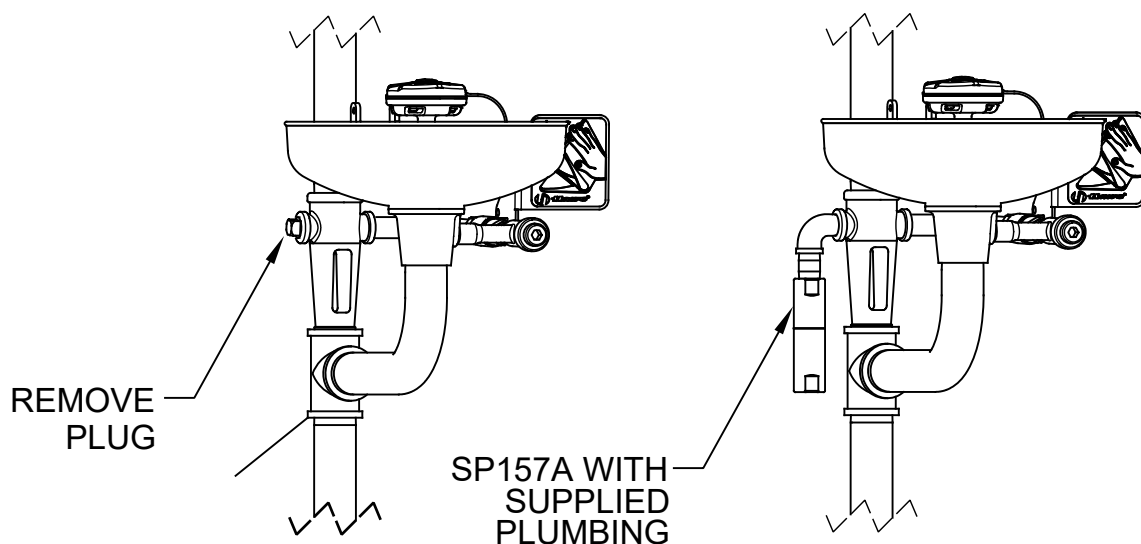

8317CTFP SCALD VALVE LOCATION

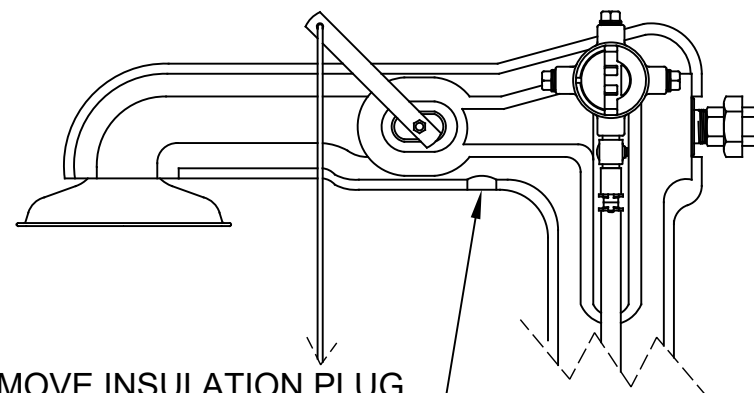

REMOVE INSULATION PLUG
AND PLUMBING PLUG, AND
INSTALL VALVE ONLY



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSO.COM
WEBSITE: WWW.HAWSO.COM

ECN NO.	REVISED PER	BY:	MODEL(S)	PART NUMBER
5478	ECN: 5478	JL	SP157A	0002080329.D
DRAWN:	DATE:	CHK'D:	SCALD PROTECTION BLEED VALVE	REVISION
HM	10/17/13	DP		5
APPROVED:	DATE:	SCALE:	DRAWING TYPE:	INSTALLATION
IR	09/12/19	1:1		
				SIZE: A SHEET 1 OF 1